


Since   
1977  
Design. Development. Manufacturing

# GEN | ON



Sealed Maintenance Free Pure Lead Tin Battery

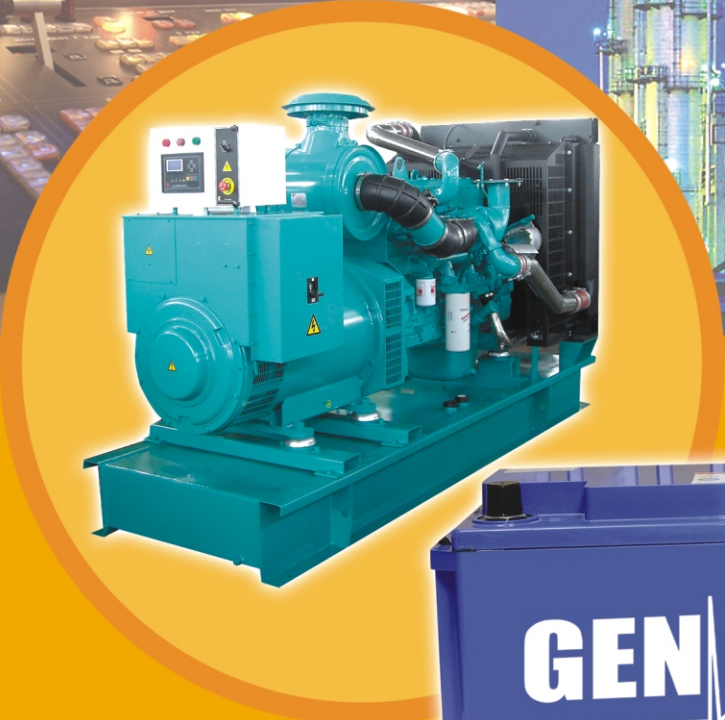

Genon batteries are made with state of the art "Pure Lead Tin Thin Plate" technology to deliver high cranking currents. This ensures a reliable start of the genset in any environmental condition.

Genon is a Sealed Maintenance Free battery, delivered in factory charged and ready to use condition.

## FEATURES

- High Cranking Current : Smaller battery for the same job
- Low Self Discharge : Assured start even after idle condition for long duration
- Maintenance Free : No water top-up and specific gravity checks
- Terminals with copper alloy : High electrical conductivity  
No corrosion, No wear and tear

## BATTERY MODELS & SELECTION CHART

MODEL	No. of 12V Batteries *	GENSET RATING (KVA)	Battery Dimensions (L X W X H in mm)	Weight (Kg)	CCA as per SAE (Amps)	Conventional Equivalent
GN 32-12	1	7.5, 10	165 x 145 x 210	12.5	425	12V 60Ah
GN 50-12	1	15 to 62.5	230 x 168 x 186	16	550	12V 88 to 100Ah
GN 70-12	1	82.5 to 140	330 x 168 x 200	24	720	12V 120 to 150Ah
GN 50-12	2	50 to 140	230 x 168 x 186	16	550	12V 88 to 100Ah
GN 70-12	2	160 to 380	330 x 168 x 200	24	720	12V 120 to 150Ah
GN 80-12	2	500 to 625	410 x 176 x 210	30	850	12V 180 to 200Ah
GN 160-12	2	750 to 1500	525 x 225 x 240	58	1600	2 x 12V 180 to 200Ah

\* No of batteries depends on starter motor rating / voltage.

Genon batteries complies to international standard IEC 60095-1:2006.

Note: Alternator output voltage must be in between 13.8 to 14.2V for a 12V rating and 27.6 to 28.4V for a 24V rating to prevent damage to battery



**HBL Power Systems Limited**

Hyderabad, AP, INDIA  
website : [www.hbl.in](http://www.hbl.in)

**Dealer details:**